


# Tire Swing

This illustration shows the 5.5 Foot Tire Swing fastened to the Mt. Shasta play system.

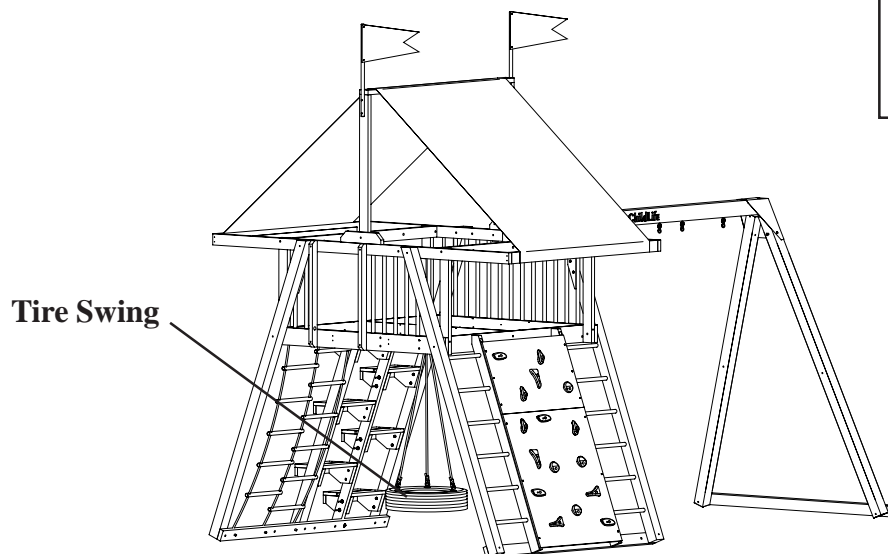

---

Congratulations and thank you for purchasing a fine ChildLife® brand play system!

Please read this instruction sheet completely before starting assembly.

**DO NOT** allow any use of the equipment until it has been completely assembled and installed in accordance with these instructions. Serious injury could result.

Please keep a copy of your order and our catalog with this sheet for future reference.

**Continued on reverse. If the reverse is blank, do NOT install your Tire Swing.  
Call ChildLife immediately for a free replacement copy of these instructions.**

---

The Tire Swing is an add-on to your ChildLife play system. These assembly instructions must be used in conjunction with the Assembly Instructions and Owner's Manual of the play system you have purchased.

Refer to the Assembly Instructions and Owner's manual of the play system you have purchased for very important information you need to know:

- Choosing a Safe Installation Site
- Safety During Installation
- Tools Required
- Hardware and Safety Nut Information
- Maintenance Instructions
- Instructions for safe use

Please be sure you read and understand our recommendations for safe installation sites and safety during installation, as well as the US Consumer Products Safety Commission's recommendations concerning the depth of various resilient surfacing materials. If you do not have the Assembly Instructions and Owner's Manual of the play system you have purchased, which contains this important information, contact ChildLife Inc at (800) 467-9464 or (508) 429-4639 for a free replacement copy.

### Mounting your Tire Swing (refer to the Figure)

1. Attach the tire swivel (1) to the swing block (4) using two carriage bolts (2) and safety nuts (3) as shown. Tighten the hardware securely.
2. Mount the swing block (4) to the under side of the deck sections using four carriage bolts (5) and safety nuts (6) as shown. Tighten the hardware securely. For 5.5' model, proceed to step 3. For 7' model, proceed to step 4.
3. For 5.5' deck height only, attach the tire swing assembly (7) to the tire swivel (1).  
For 7' deck height only, attach the tire swing assembly (7) to the swing chain (9). Use the safety clip (8) to attach the swing chain (9) to the tire swivel (1).

### Parts List

- |    |            |                                   |         |
|----|------------|-----------------------------------|---------|
| 1. | 7B-6414-00 | Tire swivel                       | (Qty 1) |
| 2. | 1B-6667-00 | Carriage bolt (1/4-20 x 3-1/4)    | (Qty 2) |
| 3. | 2B-6206-00 | Safety nut (1/4-20)               | (Qty 2) |
| 4. | 2W-7762-01 | Swing block                       | (Qty 1) |
| 5. | 1B-6692-00 | Carriage bolt (5/16-18 x 3-1/2)   | (Qty 4) |
| 6. | 2B-6206-00 | Safety nut (5/16-18)              | (Qty 2) |
| 7. | 4A-7346-00 | Tire swing assembly               | (Qty 1) |
| 8. | 4B-6068-00 | Safety Clip (7' deck height only) | (Qty 1) |
| 9. | 7B-6421-00 | Swing chain (7' deck height only) | (Qty 1) |

